


FIG 909 - SOCKET

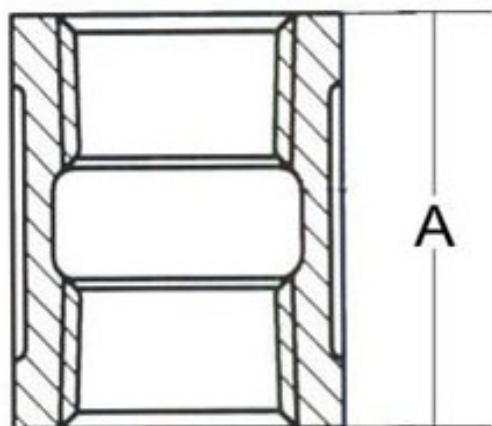

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
909/0008	¼"	8	27
909/0010	⅜"	10	29
909/0015	½"	15	35
909/0020	¾"	20	38
909/0025	1"	25	44
909/0032	1¼"	32	49
909/0040	1½"	40	53
909/0050	2"	50	63
909/0065	2½"	65	72
909/0080	3"	80	74
909/0100	4"	100	84
909/0150	6"	150	150

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPa)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPa

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards