


FIG 922 - ROUND CAP

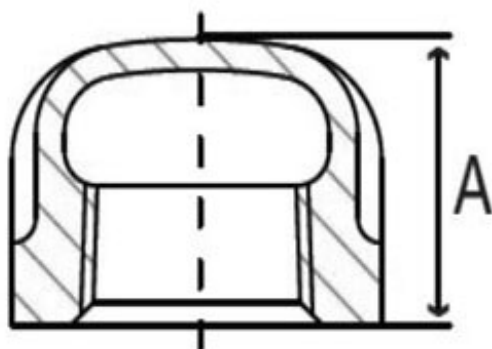

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
922/0010	3/8"	10	
922/0015	1/2"	15	19
922/0020	3/4"	20	22
922/0025	1"	25	24
922/0032	1 1/4"	32	27
922/0040	1 1/2"	40	28
922/0050	2"	50	32
922/0065	2 1/2"	65	35
922/0080	3"	80	39
922/0100	4"	100	42

TECHNICAL DATA:

Maximum Pressure:
Maximum Temperature:
Tensile Strength:
Hardness:
Elongation Rate:

16 BAR (230PSI) (1.6MPa)
200°C (392°F)
330MPa
HB150 (Brinell)
8%

Suitable Applications:
Material:

Water, Oil, Gas, Petro-Chemical
Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards