


## FIG 923 - HOLLOW PLUG

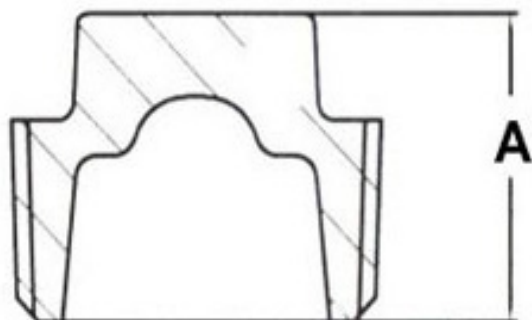

### SIZE RANGE / DIMENSIONS

| ITEM CODE | BSP    | METRIC mm | A  |
|-----------|--------|-----------|----|
| 923/0010  | 3/8"   | 10        | 18 |
| 923/0015  | 1/2"   | 15        | 21 |
| 923/0020  | 3/4"   | 20        | 23 |
| 923/0025  | 1"     | 25        | 26 |
| 923/0032  | 1 1/4" | 32        | 30 |
| 923/0040  | 1 1/2" | 40        | 31 |
| 923/0050  | 2"     | 50        | 36 |
| 923/0065  | 2 1/2" | 65        | 46 |
| 923/0080  | 3"     | 80        | 48 |
| 923/0100  | 4"     | 100       | 57 |

### TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPA)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPA

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

**LONGER LASTING** Heavy duty, hot dipped galvanised  
**PIN HOLE FREE** Individually pressure tested  
**TAPERED THREADS** Conform to (ISO 7-1) British standards