


FIG 924 - CROSS

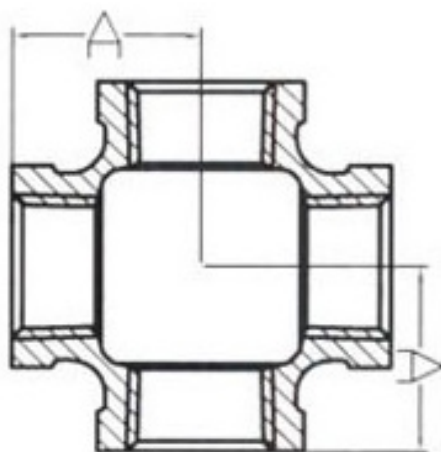

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
924/0015	½"	15	27
924/0020	¾"	20	32
924/0025	1"	25	37
924/0032	1¼"	32	44.5
924/0040	1½"	40	49
924/0050	2"	50	57
924/0065	2½"	65	68.5
924/0080	3"	80	77.5
924/0100	4"	100	96.5

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPa)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPa

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards